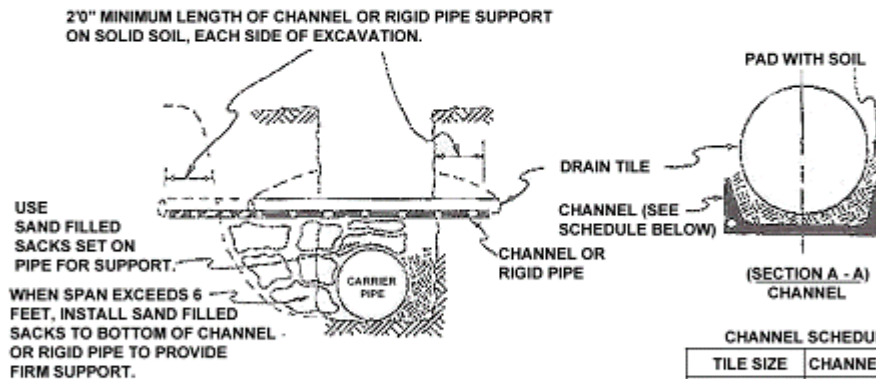
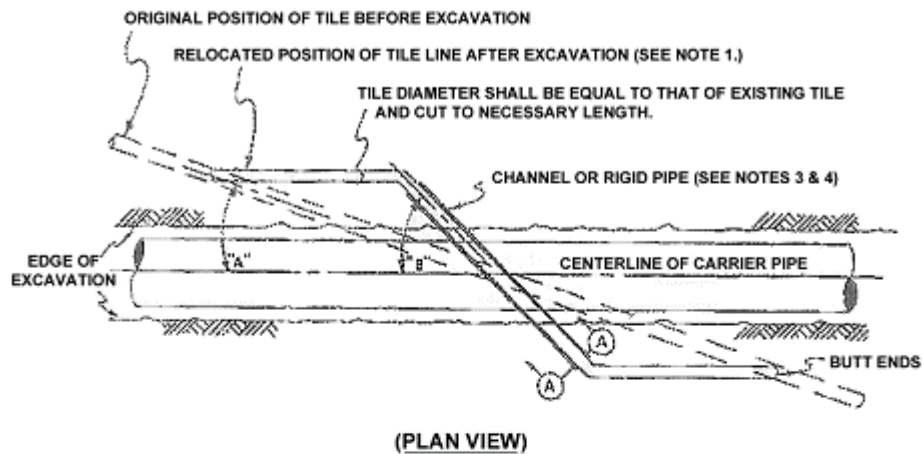


199—9.7(479,479B) Enforcement. A pipeline company shall fully cooperate with county inspectors in the performance of their duties under Iowa Code sections 479.29 and 479B.20, including giving proper notice of trenching, permanent tile repair, or backfilling. If the pipeline company or its contractor does not comply with the requirements of Iowa Code section 479.29 or 479B.20, with the land restoration plan, or with an independent agreement on land restoration or line location, the county board of supervisors may petition the utilities board for an order requiring corrective action to be taken or seeking imposition of civil penalties, or both. Upon receipt of a petition from the county board of supervisors, the board will schedule a hearing and such other procedures as appropriate. The county will be responsible for investigation and for prosecution of the case before the board.


Drawing No. IUB PL-1

RESTORATION OF DRAIN TILE**(METHOD OF SUPPORT -- ELEVATION)****NOTES:**


1. TILE SHALL BE RELOCATED AS SHOWN WHEN ANGLE "A" BETWEEN PIPELINE AND ORIGINAL TILE IS LESS THAN 20° UNLESS OTHERWISE AGREED TO BY LANDOWNER AND COMPANY.
2. ANGLE "B" SHALL BE 45° FOR USUAL WIDTHS OF TRENCH. FOR EXTRA WIDTHS, IT MAY BE GREATER.
3. DIAMETER OF RIGID PIPE SHALL BE OF ADEQUATE SIZE TO ALLOW FOR THE INSTALLATION OF THE TILE FOR THE FULL LENGTH OF THE RIGID PIPE.
4. OTHER METHODS OF SUPPORTING DRAIN TILE MAY BE USED IF THE ALTERNATE PROPOSED IS EQUIVALENT IN STRENGTH TO THE CHANNEL SECTIONS SHOWN AND IF APPROVED BY THE LANDOWNER.

CHANNEL SCHEDULE

TILE SIZE	CHANNEL SIZE
3"	4" AT 5.4#
4" - 5"	5" AT 6.7#
6" - 9"	7" AT 9.8#
10" & LARGER	10" AT 15.3#



Drawing No. IUB PL-2

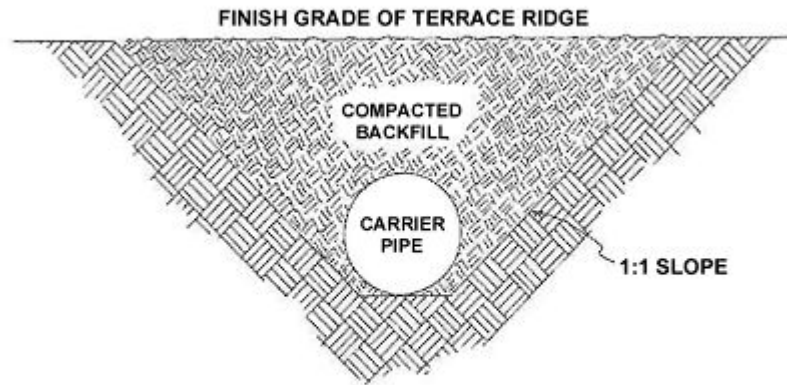RESTORATION OF TERRACE**NOTE:**

COMPACTION OF BACKFILL TO BE EQUAL TO THAT OF THE UNDISTURBED
ADJACENT SOIL.

IUB PL-2